



## NBC-255-P IP Camera



- ▶ **Complete network video surveillance system inside a compact camera**
- ▶ **Progressive scan for sharp images of moving objects**
- ▶ **Dual-streaming: H.264 and M-JPEG**
- ▶ **Removable SD/SDHC card offers days of storage inside camera**
- ▶ **PC surveillance software supports multiple camera monitoring**
- ▶ **Two-way audio and audio alarm**
- ▶ **Power over Ethernet (IEEE 802.3af compliant)**

The Bosch NBC-255-P IP camera is a ready-to-use, complete network video surveillance system inside a compact camera. This camera brings Bosch's high-performance technology into the realm of small office and retail businesses by offering a cost-effective solution for a broad range of applications.

To use the camera as a stand-alone video surveillance system, simply take it out of the box, plug it in, start it and walk away – it's already recording. In this mode, no additional equipment is required.

For medium-to-large-scale or growing systems, the NBC-255-P IP camera easily integrates with the Bosch Divar XF Hybrid H.264 recorder. It uses H.264 compression technology to give you clear images while reducing bandwidth and storage by up to 30%.

### Functions

#### **Best-in-class image performance**

The Bosch NBC-255-P IP camera delivers the clearest images and most accurate colors within its class. Progressive scan ensures moving objects are always sharp.

#### **Dual streaming video**

Dual streaming allows a data stream to be encoded simultaneously according to two different, individually customized settings. Two types of streams can serve different purposes. For example, use H.264 stream for local recording and viewing, and the M-JPEG stream to provide compatibility with legacy DVRs.

#### **Efficient recording**

A removable SD/SDHC card offers edge recording inside the NBC-255-P IP camera. This SD card not only saves network bandwidth but also reduces the requirement for a high-capacity hard disk or DVR. When used with an SD card, the NBC-255-P IP camera is a complete self-contained surveillance system without the need for additional equipment.

The NBC-255-P IP camera can also be used with an iSCSI server connected via the network to store long-term recordings.

#### **PC surveillance software**

The bundled PC surveillance software offers a user-friendly interface to support easy installation and configuration. A wizard allows the configuration of multiple cameras simultaneously using an auto detection device. Multiple cameras can be monitored in one screen and video clips on SD card can be archived and searched in a single application.

**Two-way audio and audio alarm**

Two-way audio allows remote users to listen in on an area and communicate messages to visitors or intruders via an external loudspeaker (not included). Audio detection can be used to generate an alarm if needed.

**Tamper and motion detection**

A wide range of configuration options is available for alarms signaling camera tampering. A built-in algorithm for detecting movement in the video can also be used for alarm signaling.

**Wide system compatibility**

The latest Open Network Video Interface Forum (ONVIF) standard ensures compatibility with other surveillance products. The NBC-255-P IP camera is ONVIF-ready. This will contribute to a reduction in future upgrade or migration costs.

**Power-over-Ethernet**


Power for the camera can be supplied via a Power-over-Ethernet (IEEE 802.3af) compliant network cable connection. With this configuration, only a single cable connection is required to view, power, and control the camera.

**Certifications and Approvals**

| Region                 | Certification                                      |
|------------------------|--|
| Europe                 | CE Declaration of Conformity                       |
| Safety                 | EU: EN 60950-1: 2006, Reference IEC 60950-1:2005   |
|                        | US: UL 60950-1: 1st edition dated October 31, 2007 |
|                        | Canada: CAN/CSA-C22.2 NO. 60950-1-03               |
| EMC                    | EN 50130-4:1995 + A1:1998 + A2:2003                |
|                        | FCC Part15 Subpart B, Class B                      |
|                        | EMC directive 2004/108/EC                          |
|                        | EN 55022 class B                                   |
|                        | EN 61000-3-2 :2006                                 |
|                        | EN 61000-3-3 : 1995+A1 :2001+A2 :2005              |
|                        | EN 55024   |
|                        | AS/NZS CISPR 22 (equal to CISPR 22)                |
|                        | ICES-003 Class B                                   |
|                        | EN 50121-4:2006                                    |
| Product Certifications | CE, FCC, UL, cUL, C-tick, CB, VCCI, KCC            |
| Power supply           | CE, UL, cUL, PSE, CCC                              |


**Installation/Configuration Notes**

**Connections**

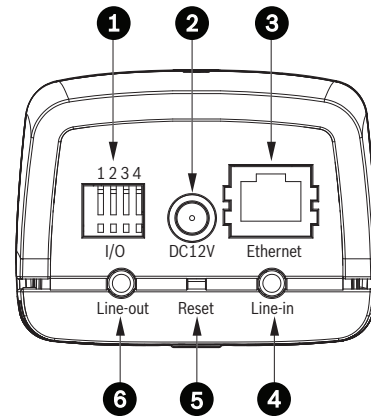

- 1 I/O
- 2 Power 12 VDC
- 3 Ethernet RJ45
- 4 Audio Line-in
- 5 Reset
- 6 Audio Line-out

**Dimensions**

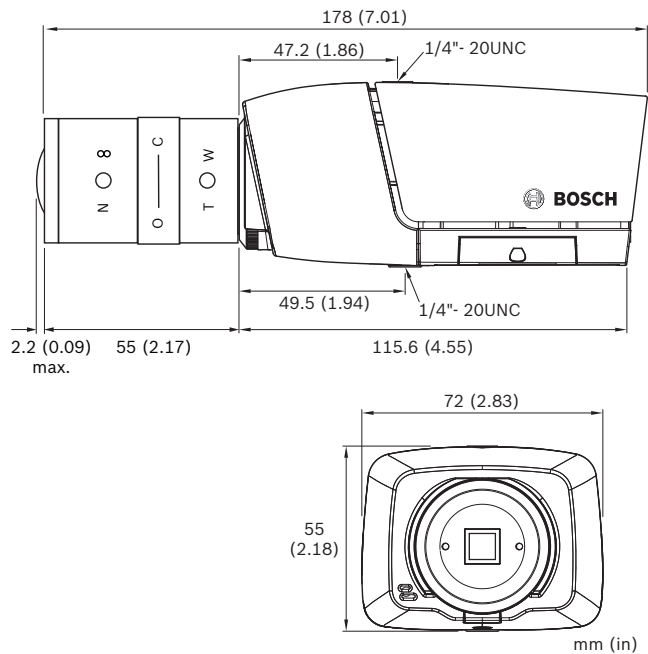

## Parts Included

| Quantity | Component   |
|----------|---|
| 1        | NBC-255-P IP camera with 2.8 to 10 mm varifocal CS-mount lens |
| 1        | Quick Installation Guide                                      |
| 1        | CD ROM with BVIP Lite Suite and documentation                 |
| 1        | Camera mount kit  |
| 1        | SD card (warranty provided by card manufacturer)              |
| 1        | Universal power supply with US, EU and UK plug                |

## Technical Specifications

### Power

|                   |                                |
|-------------------|--------------------------------|
| Input voltage     | +12 VDC or Power-over-Ethernet |
| Power consumption | 3.36 W (max)                   |

### Video

|                   |  |
|-------------------|--|
| Sensor type       | ¼-inch CMOS  |
| Sensor pixels     | 640 x 480  |
| Sensitivity       | 1.0 lux at F1.4  |
| Video resolution  | VGA, QVGA  |
| Video compression | H.264 MP (Main Profile); H.264 BP+ (Baseline Profile Plus); M-JPEG |
| Frame rate        | 30/25 fps: all resolutions, dual stream                            |

### Lens

|            |                                       |
|------------|---------------------------------------|
| Lens type  | Varifocal 2.8 to 10 mm, F1.4 to close |
| Lens mount | CS mount                              |

### Connection

|             |                 |
|-------------|-----------------|
| Alarm input | +9 to 30 VDC    |
| Relay out   | 24 VAC/VDC, 1 A |

### Audio

|                     |   |
|---------------------|---|
| Audio input         | Built-in microphone<br>Line in jack connector |
| Audio output        | Line out jack connector                       |
| Audio communication | Two-way, full duplex                          |
| Audio compression   | G.711   |

### Local Storage

|              |   |
|--------------|---|
| SD card slot | Supports up to 32 GB SD/SDHC card                                     |
| Recording    | Continuous recording, ring recording, alarm/events/schedule recording |

### Software Control

|                    |   |
|--------------------|---|
| Unit configuration | Via web browser or PC surveillance software |
|--------------------|---|

### Network

|           |   |
|-----------|---|
| Protocols | HTTP, HTTPS, SSL, TCP, UDP, ICMP, RTSP, RTP, RTCP, IGMPv2/v3, SMTP, POP3, FTP, DHCP client, ARP, DNS, DDNS, NTP, SNMP |
| Ethernet  | 10/100 Base-T, auto-sensing, half/full duplex, RJ45   |
| PoE       | IEEE 802.3af compliant  |

### Mechanical

|                                  |   |
|----------------------------------|---|
| Dimensions with lens (H x W x D) | 55 x 72 x 178 mm (2.17 x 2.83 x 7.01 in.) |
| Weight (with lens)               | Approx. 245 g (0.54 lb)                   |
| Mounting                         | ¼-inch mounting socket on top and bottom  |

### Environmental

|   |   |
|---|---|
| Operating temperature Camera                      | 0 °C to +50 °C (+32 °F to +122 °F)            |
| Operating temperature Universal Power Supply Unit | 0 °C to +40 °C (+32 °F to +104 °F)            |
| Storage temperature                               | -20 °C to +70 °C (-4 °F to +158 °F)           |
| Humidity  | 10% to 80% relative humidity (non condensing) |

## Ordering Information

| NBC-255-P IP Camera   | NBC-255-P |
|---|-----------|
| IP Camera System including varifocal lens, mount and power supply |           |

### Accessories

|   |            |
|---|------------|
| LTC 9348/00 Series Indoor Dome Housings for cameras/lens to 216 mm (8.5 in), ceiling mount, tinted, metal backbox | LTC9348/00 |
| UHI-SBG-0 Series Indoor Housing For camera/lens lengths up to 210 mm (8.2 in.)                                    | UHI-SBG-0  |

### Software Options

|  |           |
|--|-----------|
| MVC-FAPEX<br>Archive Player Exporter license | MVC-FAPEX |
|--|-----------|



Unit 22, 670 Gympie Rd Lawnton  
[www.technorx.com.au](http://www.technorx.com.au)  
 Ph: 07 3881 2060

## 4 | NBC-255-P IP Camera